

Pack Contents

- | | | |
|-----|---|-----------------|
| 1. | 2 x Floor Fixed Netball Upright | (PEQ609) |
| 2. | 2 x Floor Fixed Netball Base | (PEQ600) |
| 3. | 2 x International Netball Ring | (PEQ629) |
| 4. | 8 x Standard SH2 Ground Sockets for Solid Floor (<i>Optional</i>) | (ASY001+BOL855) |
| 4. | 8 x Long SH2 Ground Sockets for Sprung Floors (<i>Optional</i>) | (ASY002+BOL855) |
| 5. | 8 x M12 x 30 Button Head Screw | (BOL142) |
| 6. | 4 x M10x25 Square headed Bolt | (BOL336) |
| 7. | 4 x M10 Nylock Nut | (BOL202) |
| 8. | 4 x M10x50 Stainless Steel Hex Screw | (BOL306) |
| 9. | 4 x M10 Washer | (BOL709) |
| 10. | 4 x M10 Plastic Washer | (BOL721) |
| 11. | 8 x Large M12 Washer | (BOL702) |
| 12. | 1 x 8mm Allen Key | (BOL790) |
| 13. | 4 x M10 Spring Washer | (BOL713) |

Please read instructions before you begin to assemble your netball posts. The pack contents are for a pair of posts.

View of Product

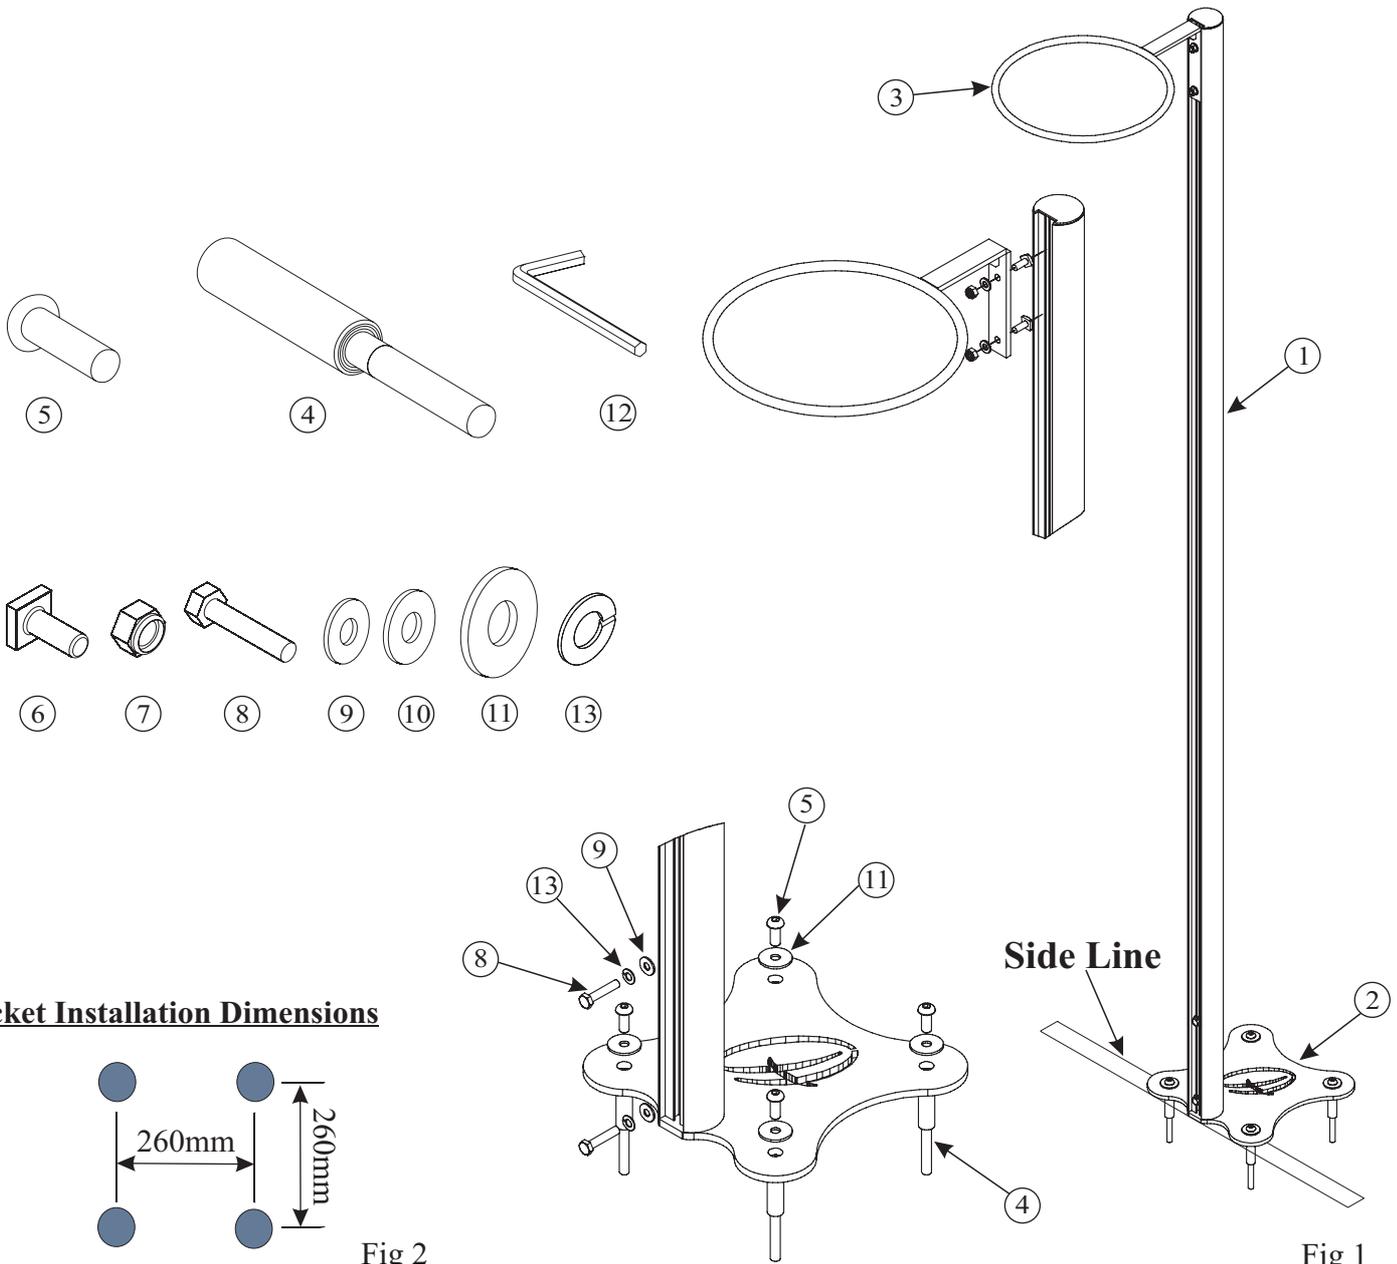


Fig 2

Fig 1

Code: NBL-032

Product: Floor Fixed Netball

Assembly Instructions

SH2 Socket Installation:

The sockets should be installed by a specialist, using the following guidelines, please contact your distributor for recommended specialist fitting engineers.

Mark at location shown in Fig 2. Drill $\text{Ø}20$ hole 160mm deep from finished floor level for standard SH2 socket or 210mm deep for longer SH2 socket (purchased separately for sprung floor).

1 Using the pack contents list overleaf, identify the parts required to assemble the Netball Posts purchased.

2 Using the M12 Button Head Socket Screws bolts provided anchor the base of the netball posts to the ground (Fig 1), secure with the 8mm Allen Key provided.

3 Slide 2 M10x25 bolts (6) up the recess of the aluminium extrusion. Offer the netball ring up to the recess in the post locating the bolts through the plate, ensure that the top of the plate in the ring is flush with the top of the post and secure with M10 Nyloc (7) and Washer (10) (Fig 3).

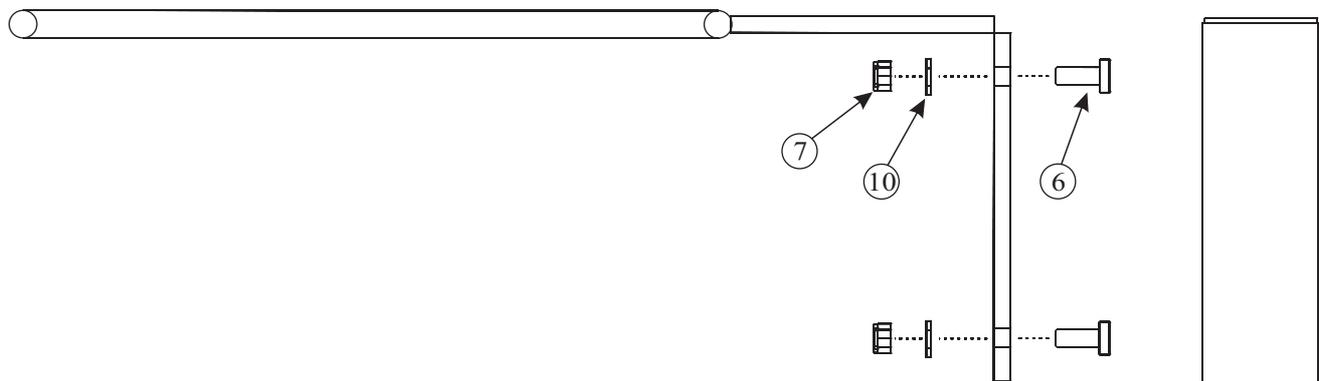


Fig 3

4 Insert the posts over the base spigot ensuring that the recess of the aluminium post is inside the court. Secure with bolt (8) and washers (9 & 13).