Pack Contents:

1. 4 x ALUMINIUM MINI RUGBY SOCKET

(WEQ737)

2. 4 x ALUMINIUM MINI RUGBY UPRIGHT

(FEQ744)

3. 1 x 4.5M ALUMINIUM MINI RUGBY CROSSBAR (PAIR)

(FEQ745)

Tools Required


- 1 x 17mm Spanner
- 1 x Spirit Level
- 1 x Tape Measure
- 2 x Step Ladders

View of Product

IMPORIANT PLEASE READ THE ASSEMBLY INSTRUCTIONS CAREFULLY BEFORE STARFING TO ASSEMBLE YOUR POSTS.

IMPORTANT

Assembly of these posts should not take place in windy conditions.

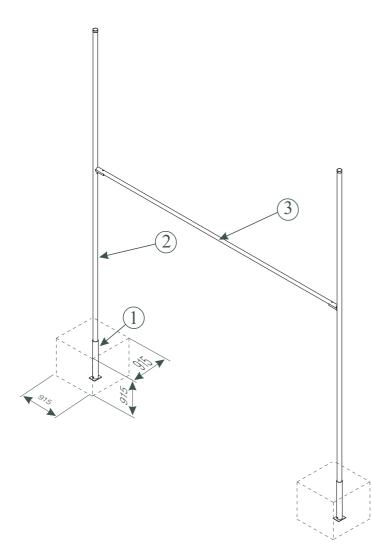


Safety Notes


- Always use mechanical assistance if the Risk Assessment highlights this requirement.
- 2 Always check fasteners before use and tighten where necessary
- 3 Periodically apply grease to fixing bolts to pre-long the life the posts.
- These posts should always be taken down in windy conditions.

Fig 1

Assembly Instructions

Install Sockets Dig holes 915 x 915 x 915mm (3ft cubed) at centres of 4564mm as shown in Fig 2. Concrete the sockets in 25mm below ground level and leave approx 100mm from top of concrete to ground level (to replace turf). Use a spirit level to make sure that the sockets are truly vertical and support until set. Replace the turf extracted when the concrete has cured (allow concrete to set before moving on to step 2).

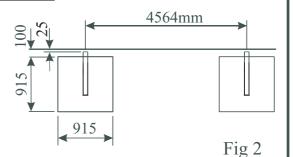

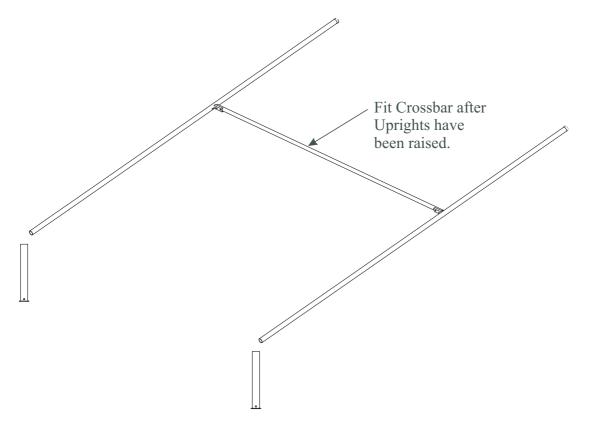

- Prepare the Uprights Position the Bottom Uprights with the Crossbar Channel facing inwards, as shown in Fig 3.
- Raise The Uprights Using mechanical assistance, lift each post (one at a time) into the vertical position and for non-hinging posts: drop the bottom upright into the socket.
- Fit The Crossbar Using a step ladder at each post, lift the crossbar into position and securely bolt it onto the top of the channel attached to the uprights with the fasteners supplied with the crossbars, see detail in Fig 3



setting the standard leading the field

Harrod UK Ltd Pinbush Road, Lowestoft, Suffolk, NR33 7NL

Telephone: ++44 (0)1502 583515 Fax +44 (0) 1502 582456 Email: sales@harrod.uk.com

www.harrod.uk.com

Hinged Post Assembly Roller ©



RUG-002 Hinged Post Assembly Roller Millennium Rugby Posts being assembled at Twickenham Stadium

The Hinged Post Assembly Roller allows you to safely erect and dismantle a set of hinged posts in a controlled manner. Designed to be mounted onto an appropriate tractor using two heavy duty 'U' Bolt brackets, the upright rolls along the device with the aid of the tractor roll bar before being lifted off by a suitable number of persons (the tractor must ideally be fitted with an angled or adjustable roll bar, brackets will fit up to a 76mm square bar).

A minimum of two people should always oversee the safe erection or dismantling of the rugby posts. Never allow the tractor's speed to exceed walking pace; we recommend that the tractor moves no faster than 3mph.

The Hinged Post Assembly Roller is manufactured from steel and fitted with a rubber roller, a quick release webbed safety strap and two 'U' bolt brackets.

The device is designed for use with hinged uprights only, we do not recommend the use of the Hinged Post Assembly Roller on socketed uprights.

3.4kg each

RUG-002











MOVIE DOWNLOADS









A short video demonstration of the hinged post assembly roller

Watch the demonstration video at


http://www.harrod.uk.com/Products.aspx?id=951


Hinged Adaptors

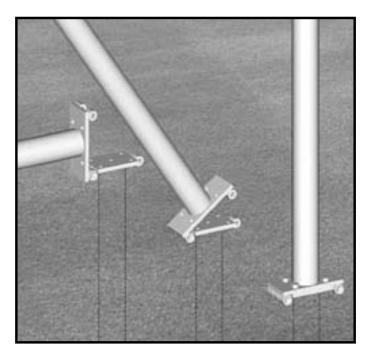











Hinged Adaptors

Hinged adaptors are designed to convert standard socketed rugby posts to a hinged model, the upright will require tailoring to size to ensure the correct crossbar height is still acheived.

Harrod UK offer a range of hinged adaptors to suit many types of uprights.

Hinge Adaptors for No.1 Steel Rugby Posts 124.00 kg per set

RUG-051

Hinge Adapters for Aluminium Rugby Posts 87.50 kg per set

RUG-052

Hinge Adaptors for No.2a Steel Rugby Posts 44.00 kg per set

RUG-053

Hinge Adaptors for No.3 Steel Rugby Posts 34.00 kg per set

RUG-054

Hinge Adaptors for Heavy Duty Steel Rugby Posts 89.00 kg per set

RUG-055