


Pack Contents

- | | |
|--|-----------|
| 1. 1 x Floor Fixed Badminton Post | (PEQ117) |
| 2. 2 x Floor Fixed Ali Badminton Base | (PEQ119) |
| <i>(Items listed below are packed within FPK030)</i> | |
| 3. 4 x M12x30mm Button Head Socket Screw | (BOL142) |
| 4. 4 x Large Washer | (BOL702) |
| 5. 1 x Velcro Net Ties | (BAD-060) |
| 6. 1 x 8mm Allen Key <i>(not shown)</i> | (BOL790) |

Optional Extras

- | | |
|---|-----------------|
| 7. 4 x Standard SH2 Ground Sockets For Solid Floors | (ASY001+BOL855) |
| 7. 4 x Long SH2 Ground Sockets For Sprung Floors | (ASY002+BOL855) |

Please read instructions before you begin to assemble your badminton posts.

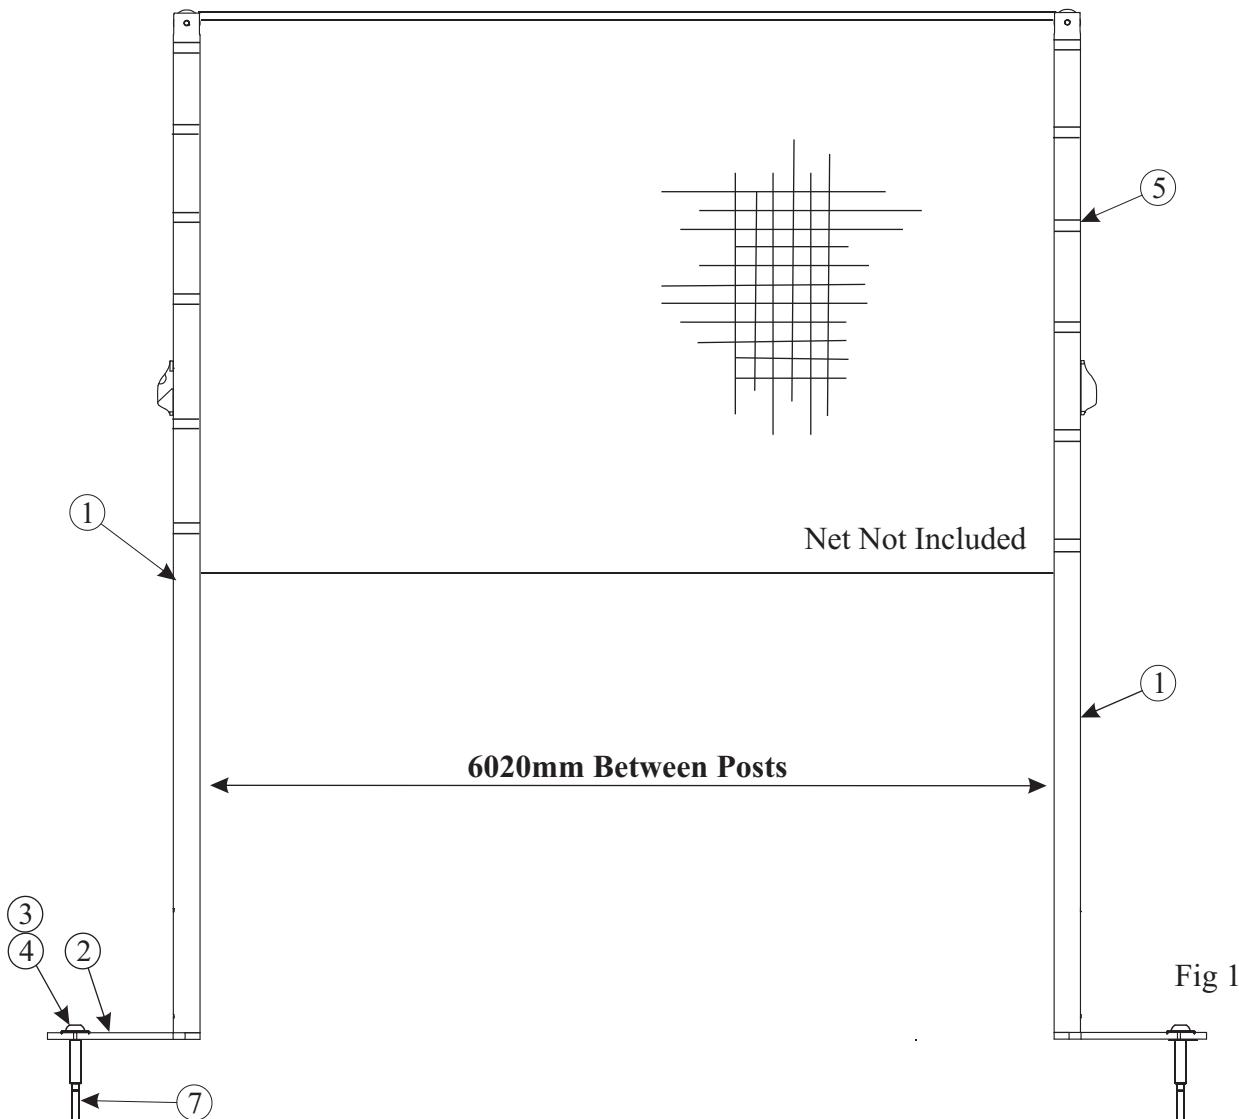

Socket Installation Dimensions



Fig 2

Code: BAD-031

Product: Floor Fixed Badminton Posts

Assembly Instructions

SH2 Socket Installation (Optional Extra):

The sockets should be installed by a specialist, using the following guidelines, please contact your distributor for recommended specialist fitting engineers.


Mark at location shown in Fig 2. Drill Ø20mm holes 160mm deep from floor level for standard SH2 sockets for solid floors or 210mm deep for longer SH2 socket for sprung floors.

Post Assembly

- 1** Using the pack contents list overleaf, identify the parts required to assemble the Badminton Posts purchased.
- 2** Using the M12 Button Head Screw (3) and Washer (4), anchor the base of the badminton posts to the ground securing with the Allen Key (6).
- 3** Slide the post over the spigot on the base and tighten up the grub screws using, the allen key provided, so that the post is tight against the base.

Attaching The Net (Not Supplied):

- 1** Attach one end of the net over the pulley wheel on one post and push through the cleat. Take the other end of the net and pass over the pulley wheel. Take some slack in the net, attach to the other cleat by pulling it through and grasping on the teeth. At this stage loosely tie the bottom of the net around the post so it keeps its shape.

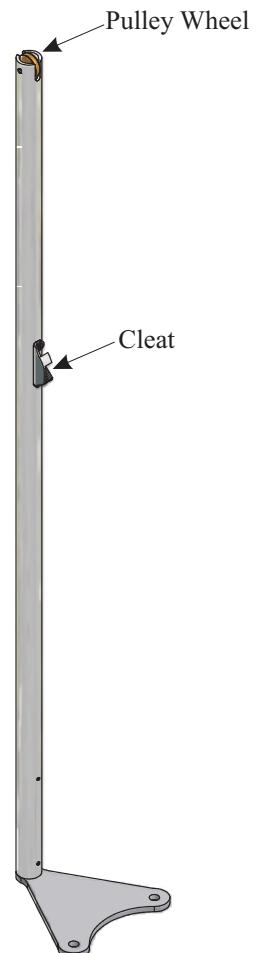

- 2** Tension the net to the correct height by pulling it through one of the cleats and securing on the teeth. Doing this one end should automatically tighten the other end.

- 3** Once the net is tensioned use the velcro net ties to hold the net tight against the post. Re-tie the bottom of the net so that this is tight. Once the posts are set up they should look like the example shown in Fig 1.