


VOL-055, VOL-056

Competition Volleyball



Only 1 person is required for this assembly
Estimated 30 minutes assembly time

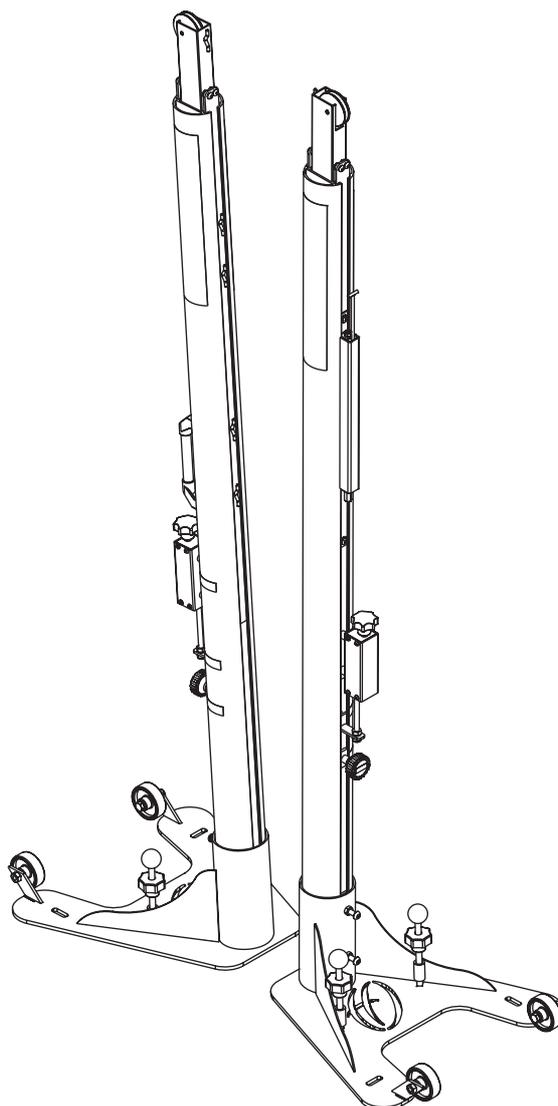

IMPORTANT: Read these instructions in their entirety before starting to assemble your Volleyball Posts.

Pack Contents

Competition Volleyball

1. Winder Upright
2. Dummy Upright
3. Base
4. Speed Brace
5. Universal Joint
6. Anchor Bolt

Tools Required



1x 6mm Hex Key



1x Tape Measure



1x Drill & 20mm Drill Bit

Recommended Extras

Net


VOL-030: Supermatch Volleyball Net

Floor Sockets


SHP-001: SH2 160mm Socket *(Solid Floor)*

SHP-100: SH2 210mm Socket *(Hollow Floor)*


Please contact your distributor for floor socket advice

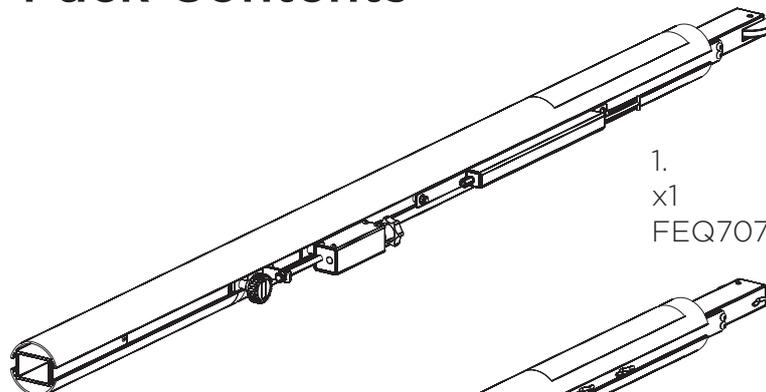


1.
x1
FEQ707

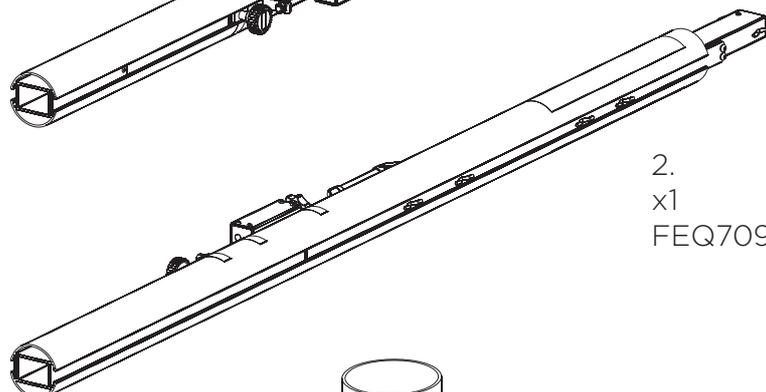


2.
x1
FEQ709

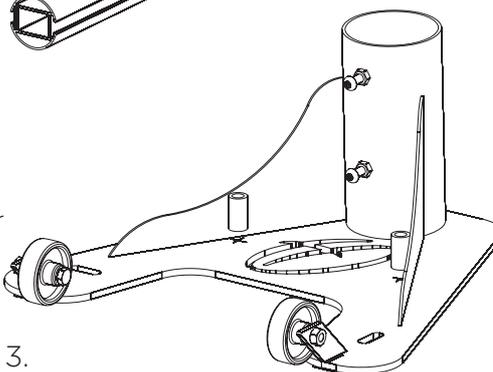


3.
x2
VOL-055 | FEQ708
VOL-056 | FEQ702

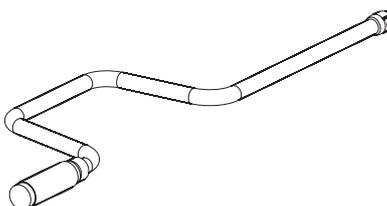

4.
x1
FAS006 (FEQ707)



5.
x1
BOL172 (FEQ707)




6.
x4
ASY702 (FEQ708/FEQ702)

* parts are not to scale

** code in brackets refers to packed part

Socket Installation


 1 Sockets require specialist installation. Please contact your distributor/floor supplier for recommended installers and fixings. Floor composition will determine the type of sockets required.

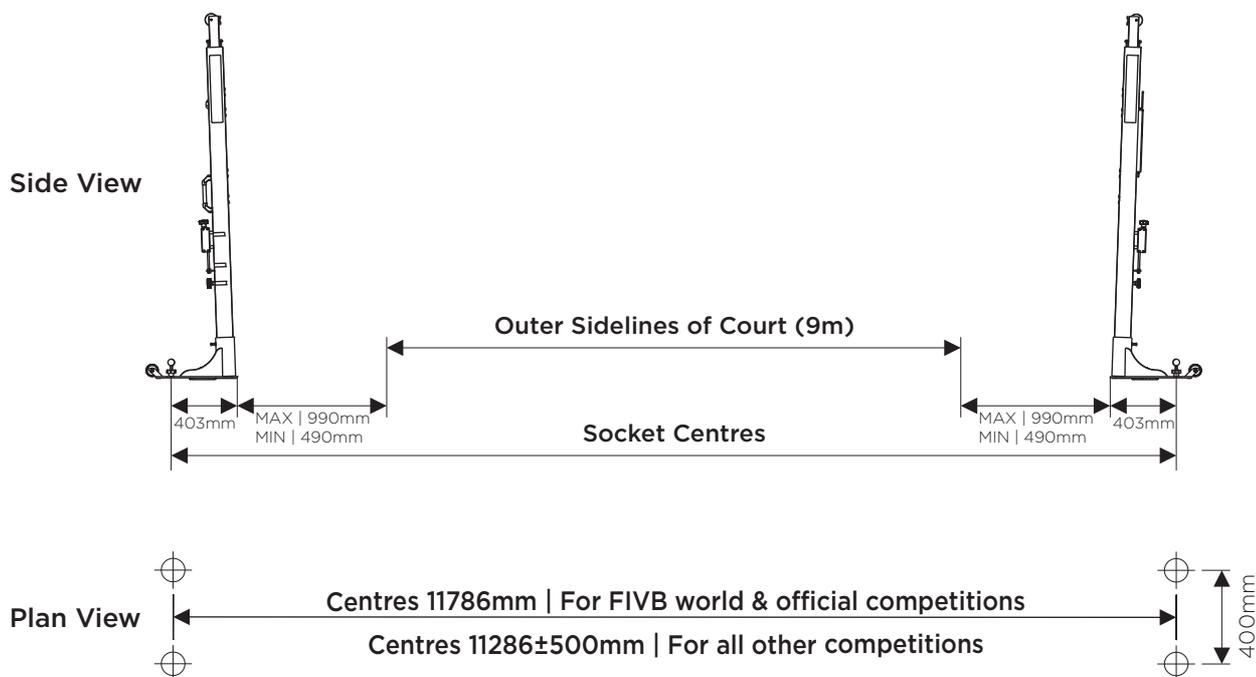


i **INFORMATION:** According to FIVB regulations, the posts sit 0.5 - 1m outside of the side lines. For FIVB, world and official competitions, the posts must sit 1m outside the sidelines.

Assembly Instructions


1 Align the slots of the Bases (3) with the ground sockets. Screw the Anchors Bolts (6) into the ground sockets using the ball knob. Ensure the bases sit perpendicular to the side line with the wheels facing away from the court. Secure the bases by tightening the handwheels.

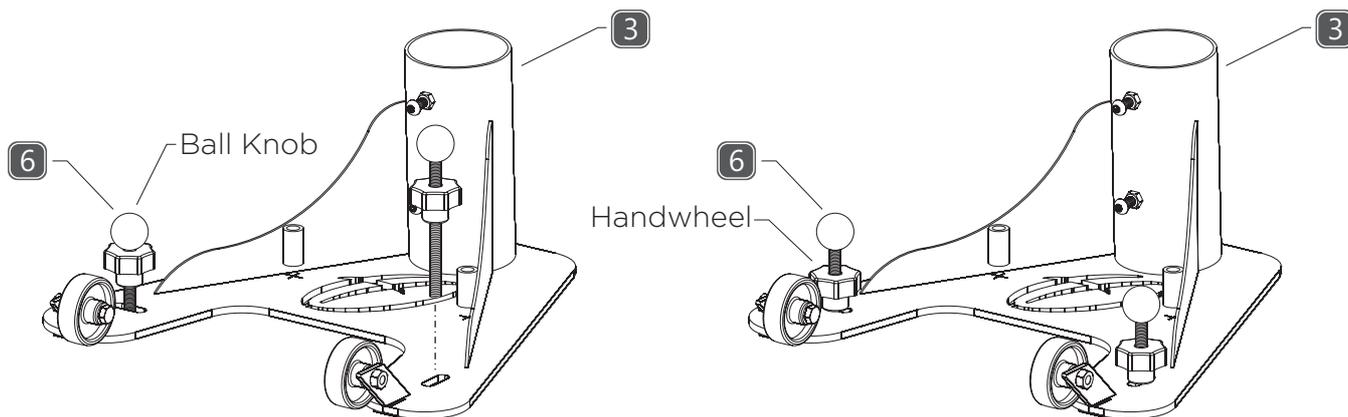

 2 Insert the uprights (1,2) into the Bases, ensuring the pulley wheels sit parallel to the half way line and adjusters face outwards from the court. Tighten the pre-fitted button head screws to secure the uprights in the base.

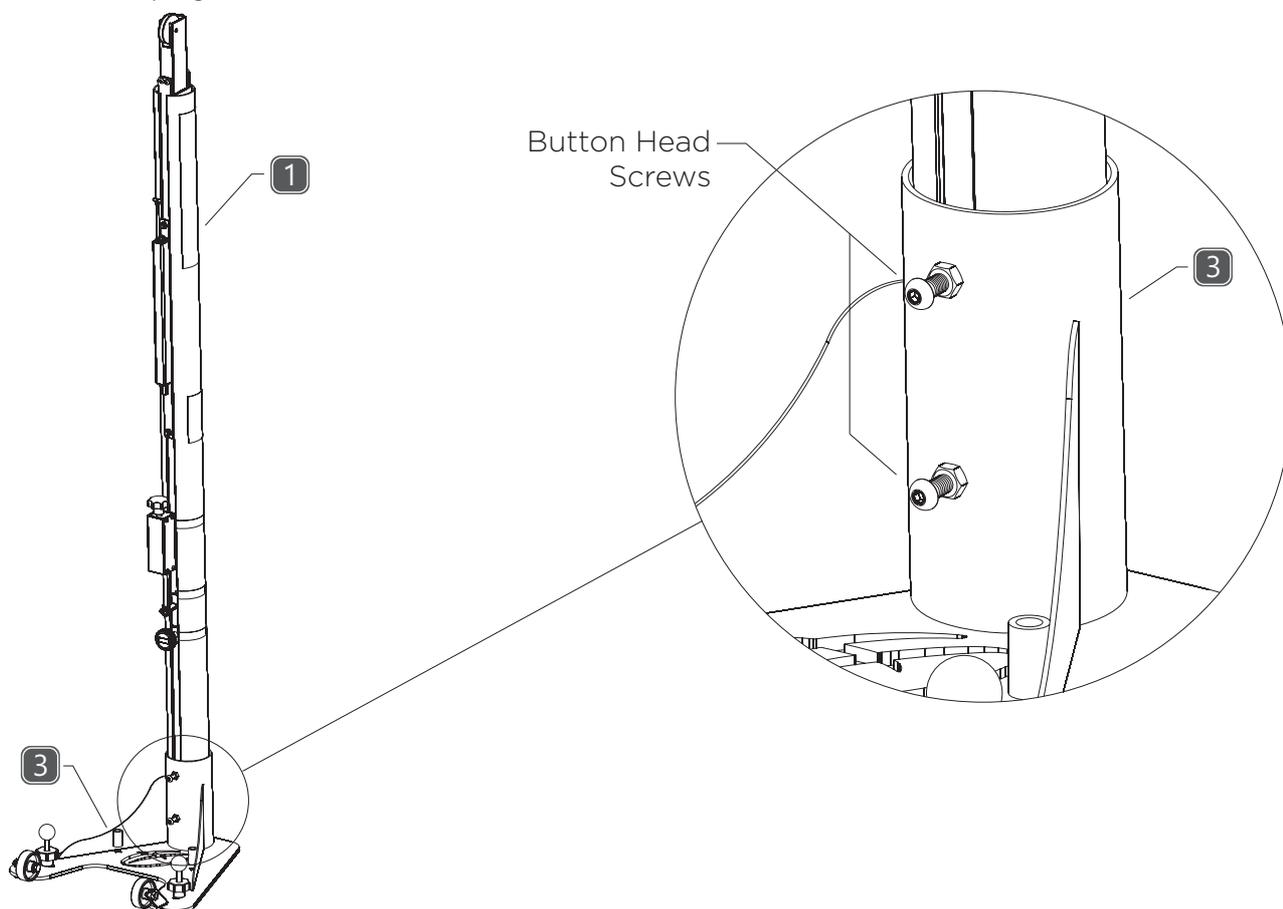


3 Using the Speed Brace (4) and Universal Joint (5), rotate the winder anti-clockwise to extend the T-bar arm to its limit. Using the plunger on each upright, set the height to the junior setting, this will aid with the initial set up of the net.

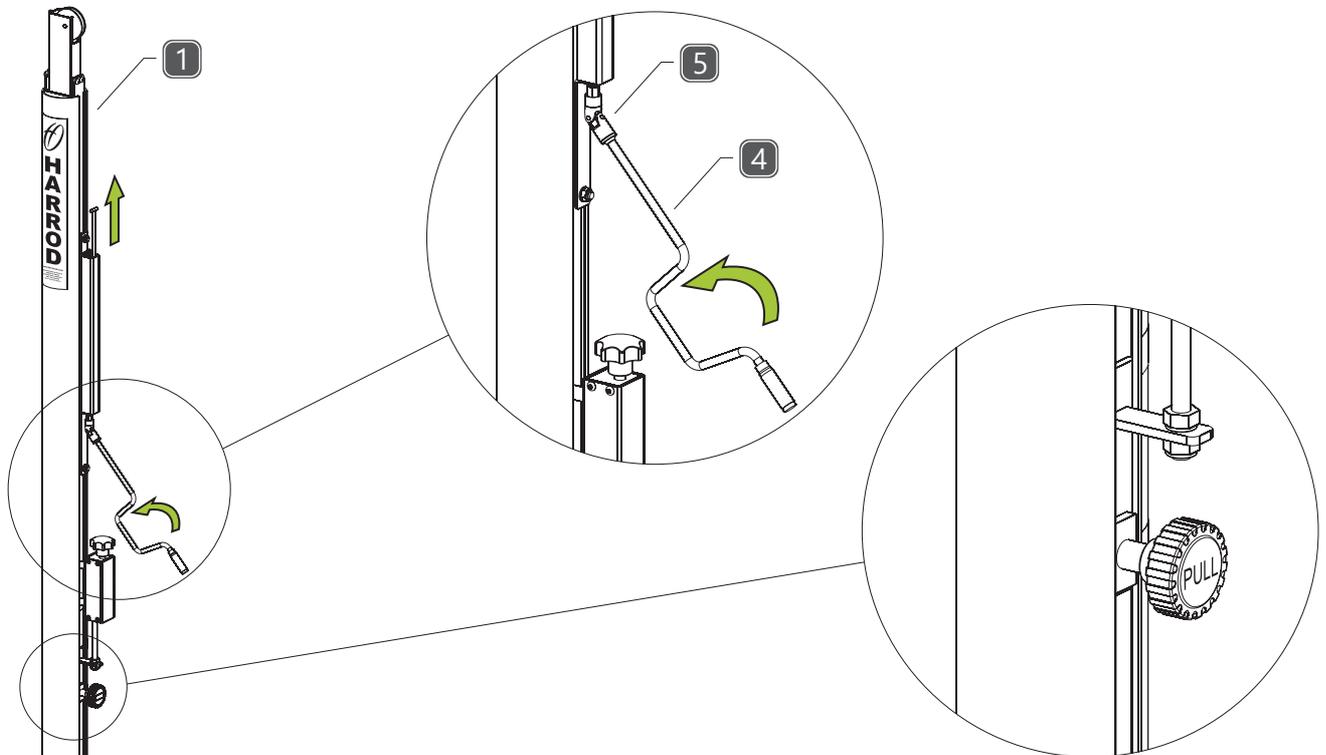


i IMPORTANT: If the winder is not set up as above, regulation net height will not be achievable.

4 Run the looped end of the net headline over the pulley wheel of the winder post and attach the loop to the T-bar of the winch. At the dummy end, run the headline over the pulley wheel and down through the aluminium cleat.

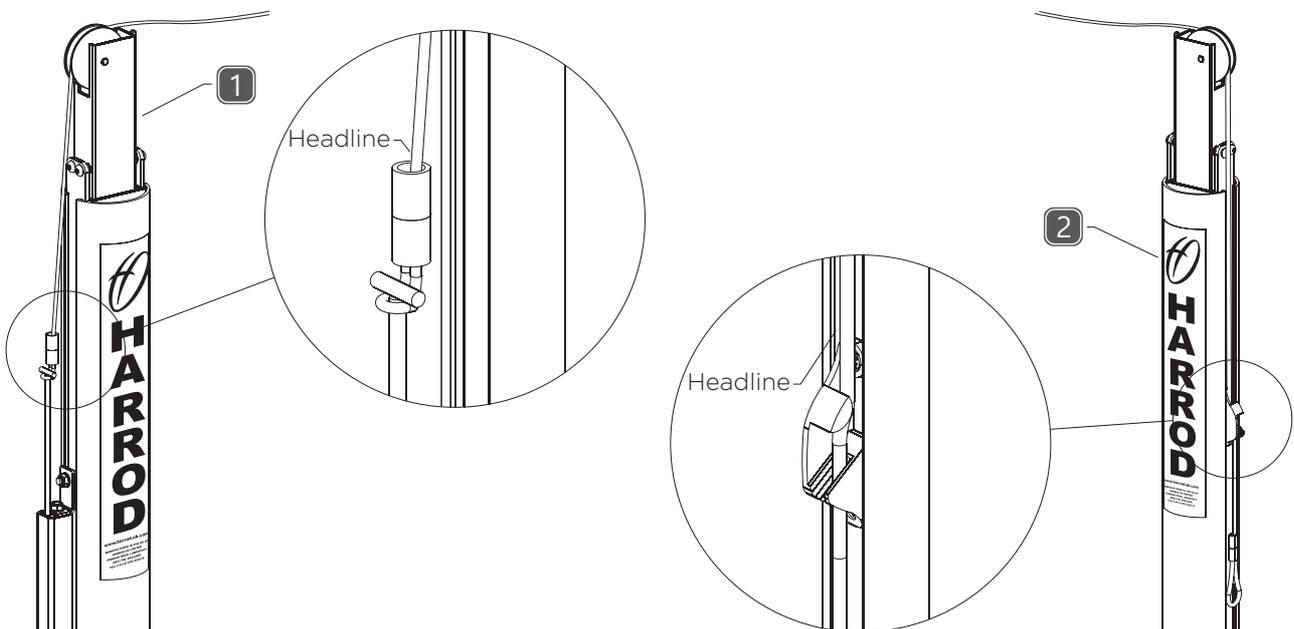

5 Use the plungers in each upright to set the posts to the desired height. Pull the plunger and raise the pulley wheel assembly in the post until the plunger locates in the corresponding height position.

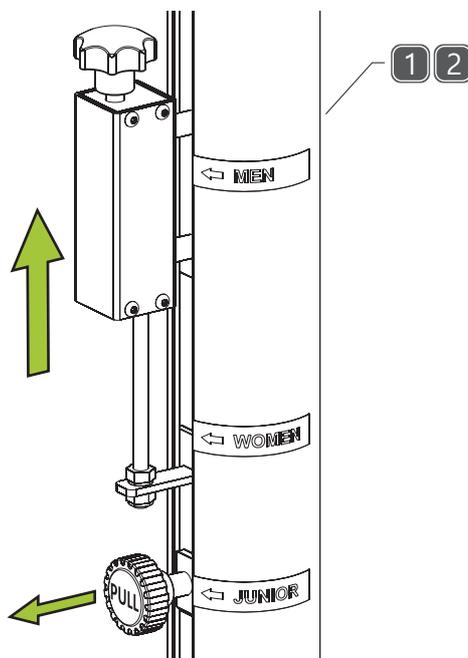

6 Pull the dummy end of the headline through the cleat as far as possible, gaining the max possible tension in the headline before using the winder.






WARNING: Do Not attempt to continue tensioning the headline if the winder becomes fully retracted before regulation net height is achieved, doing so may damage the winder mechanism.

INFORMATION: Dimensions are correct according to FIVB Rules of Volleyball as of 03/04/2018. Please refer to the latest FIVB Rules for any changes to regulations.

7 Use the Universal Joint and Speed Brace to achieve the regulation tension. The height of the net is measured from the centre of the playing court, the net height over the two sidelines must be identical on both sides and must not exceed the regulation net height by more than 20mm. If the winder fully retracts before the required tension is reached, fully release the winder and repeat Step 6, adding more tension to the headline.

8 Add tension to the net body using the side net ties. If regulation tension is achieved and the net height is incorrect, use the fine adjustment handles on both the Dummy and Winder Uprights to achieve regulation height.

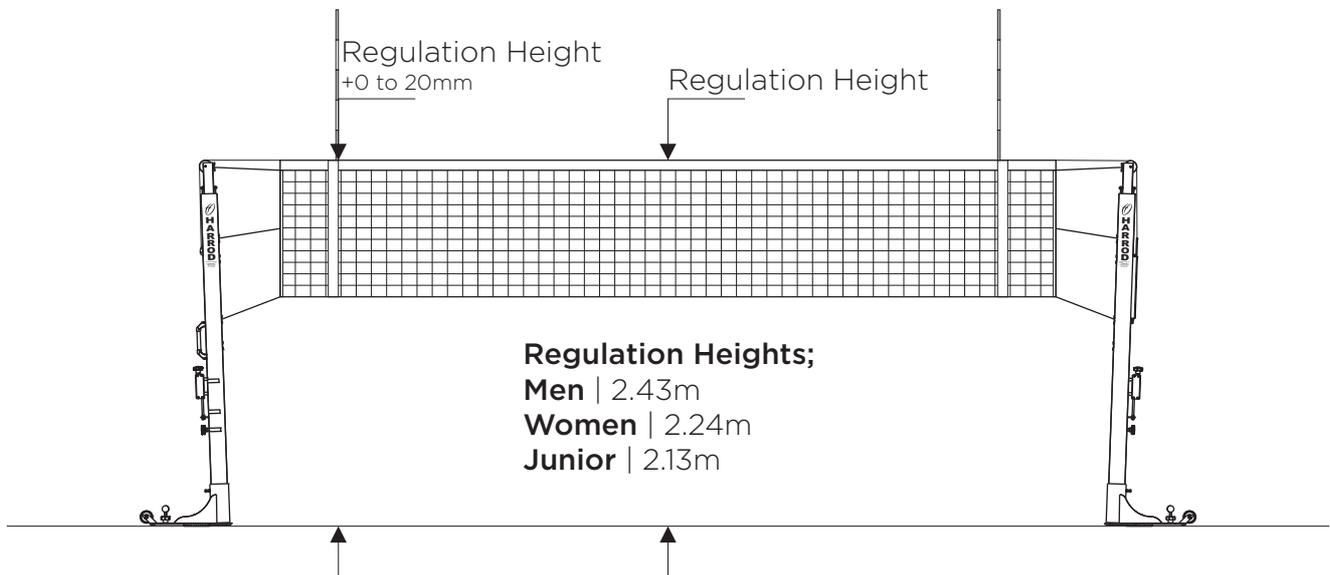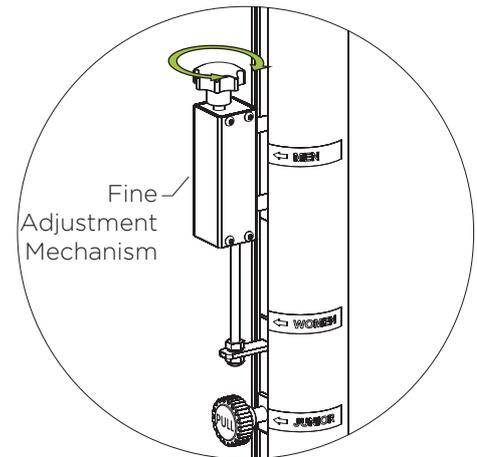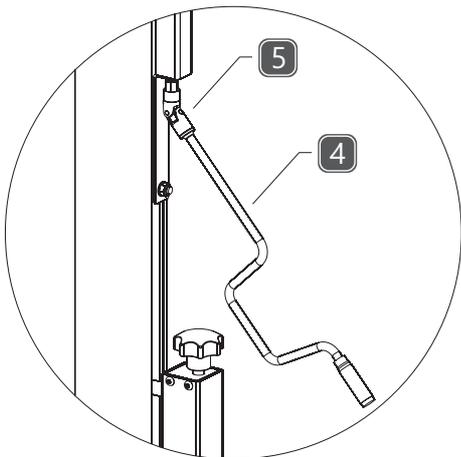

Code VOL-055, VOL-056
Product Competition Volleyball



9 To remove the net, release the net tension using the Universal Joint and Speed Brace. Ensure that the winder is fully wound out for the next use. Using the plunger, adjust the height of the posts to the junior setting and remove the net body ties. At the dummy end, pull the headline down and away from the post within in the aluminium cleat to release it. Feed it through the cleat and remove the other end from the winder T-bar.

Remove the Anchor bolts and store them in the tube on the Bases. Lean the posts back onto the wheels for transportation to the storage area. Store in a covered, dry and secure area.