

Pack Contents: * Thread lock Data Sheet Available On Request**FBL-140 4.88m 5-A-Side.**

1. 2 x 4.88m Crossbars (pair) (FEQ243)
2. 4 x Assembled Side Frames (FEQ238)
3. 4 x M12 x 25mm Set Screw (BOL163)
4. 4 x M12 Nord-Lock (BOL701)
5. 1 x *Thread lock (ADH015)
6. 4 x M12 Nut Cap White (CAP948)

FBL-141 3.66m 5-A-Side.

1. 2 x 3.66m Crossbars (pair) (FEQ236)
2. 4 x Assembled Side Frames (FEQ238)
3. 4 x M12 x 25mm Set Screw (BOL163)
4. 4 x M12 Nord-Lock (BOL701)
5. 1 x *Thread lock (ADH015)
6. 4 x M12 Nut Cap White (CAP948)

FBL-640 4.88m Mini Soccer.

1. 2 x 4.88m Crossbars (pair) (FEQ231)
2. 4 x Assembled Side Frames (FEQ237)
3. 4 x M12 x 25mm Set Screw (BOL163)
4. 4 x M12 Nord-Lock (BOL701)
5. 1 x *Thread lock (ADH015)
6. 4 x M12 Nut Cap White (CAP948)

FBL-641 3.66m Mini Soccer.

1. 2 x 3.66m Crossbars (pair) (FEQ234)
2. 4 x Assembled Side Frames (FEQ237)
3. 4 x M12 x 25mm Set Screw (BOL163)
4. 4 x M12 Nord-Lock (BOL701)
5. 1 x *Thread lock (ADH015)
6. 4 x M12 Nut Cap White (CAP948)

Tools Required

1 x 19mm Spanner

Note:

Nord-locks supplied in glued pairs.
If separated, please place cam faces together when inserting between bolt and material face.

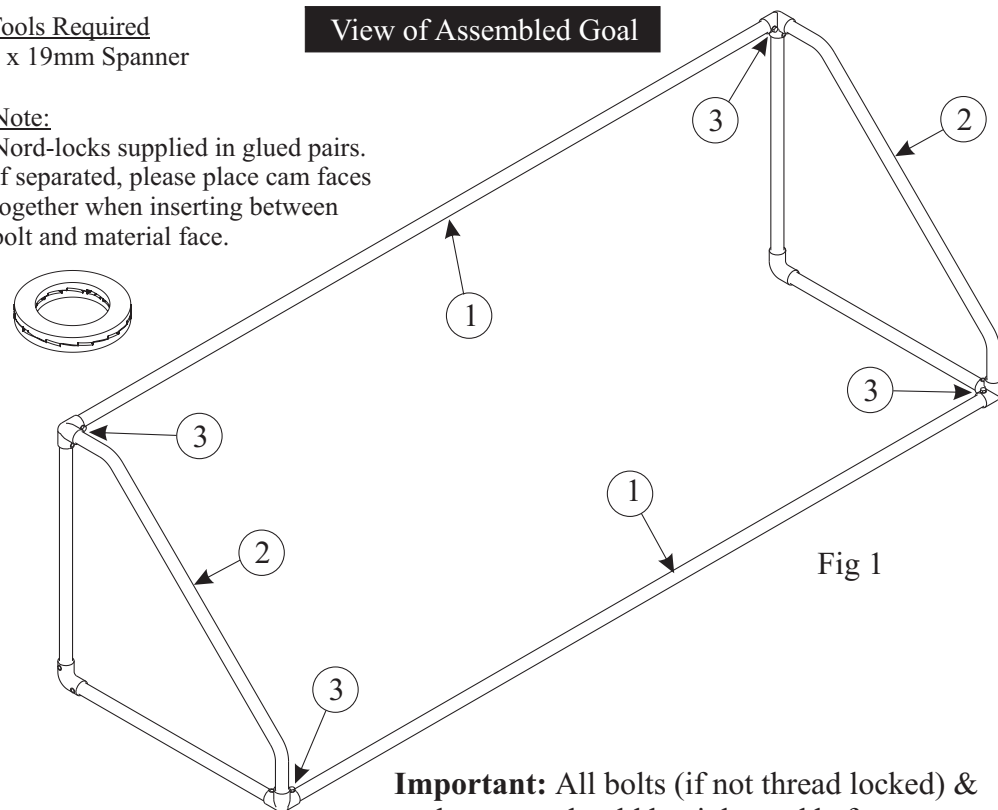


Fig 1

Important: All bolts (if not thread locked) & grub screws should be tightened before use, and should be periodically greased to prevent corrosion.

Assembly Instructions:

These goals should take 2 People around 10 minutes per set to assemble.

1 Before assembling your Goals please read all of the safety, maintenance and assembly recommendations, also check the quantities of the parts listed in the pack contents.

2 Before fixing the Crossbar (1) to the Assembled Side Frames (2) remove the grub screws in the open end of the Tube Clamps.

3 Slot Each Crossbar into the open end of a Tube Clamp and fasten using the M12 x 25mm Bolts (3), M12 nord-lock (4) & M12 Nut Cap (6) (as shown in Figures 3 & 4).

Note: If the goal is not intended to be dismantled, apply a small drop of thread lock on to each bolt then tighten immediately.

Important Safety Information

Goal posts must be anchored at all times (even when not in use).

It is essential to conduct a risk assessment of your particular site to evaluate the suitability of specific types of anchorage.

Preferred options for freestanding goals are:

1. Attachment of back bars to fixed anchorage points.
2. Attachments to surround fence by means of Fence Type Anchors.
3. Attachment of adequate freestanding counterbalance weights. (6 x ANC-006 per goal for Classic Football Goals).



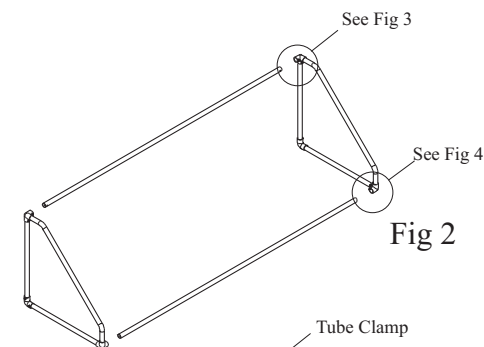


Fig 2

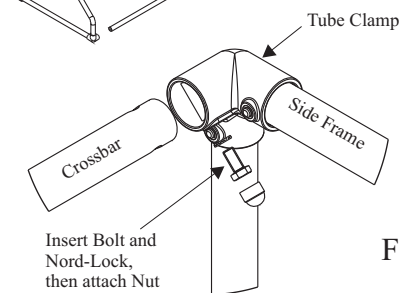

Insert Bolt and Nord-Lock, then attach Nut Cap to secure the Crossbar.

Fig 3

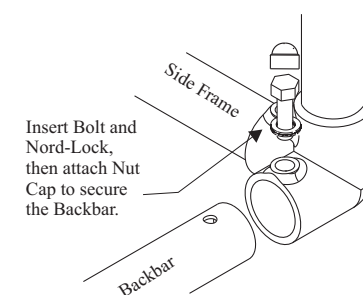

Insert Bolt and Nord-Lock, then attach Nut Cap to secure the Backbar.

Fig 4